REV.	DESCRIPTION	DATE
A		
B		08-2010

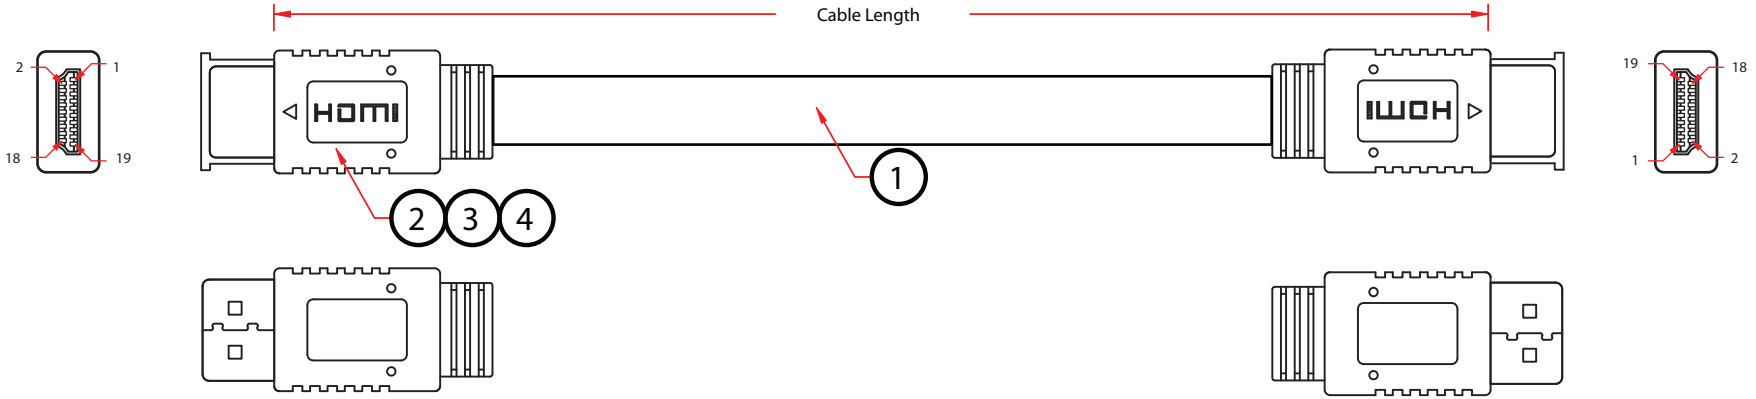

Cable Specifications:

28AWG 7/0.127mm Stranded Tinned Copper Conductor
0.025mm AL-Mylar Foil Shield
Tinned Copper Braid 16/10/0.12mm, 85% Coverage
1.0mm Foam PE(1P*5) and 0.75mm HD-PE(4C) Insulation
3.8*13.7 mm OD PVC Jacket

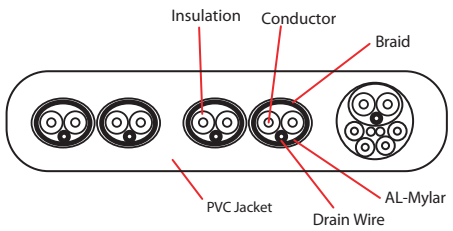

Pin Assignment

HDMI Male		HDMI Male
1	White	1
2	Drain	2
3	Red	3
4	White	4
5	Drain	5
6	Red	6
7	White	7
8	Drain	8
9	Red	9

HDMI Male		HDMI Male
10	White	10
11	Drain	11
12	Red	12
13	Yellow	13
14	White	14
17	Drain	17
19	Red	19
15	Red	15
16	Green	16
18	Purple	18
Shell	Braid	Shell

RoHS

PART NO.	CABLE LENGTH
10V3-42103	3 ft
10V3-42106	6 ft
10V3-42110	10 ft
10V3-42115	15 ft

NO.	SPECIFICATIONS
5	
4	45P PVC, Color: Black
3	Inner Molding, Color: Clear
2	HDMI 19/M 30U, Insulation: Black, Solder Type, HDMI Shell: Gold Plated, 15u
1	CL2 Inwall Rated, UL20276 [(28AWG*1P + Drain) w/Al-Foil] *4 + 28AWG*1P + 28AWG*4C, w/Al-Foil + Braid, OD: 3.8*13.7mm, Black PVC Jacket

BOM LIST

ITEM NUMBER	10V3-421xx			DRAWER	LIBRA
TITLE	HDMI Flat Cable, High Speed with Ethernet, CL2 Rated			CHECKED	
				APPROVED	
MATERIAL		SCALE			
REV.	A	UNIT	INCH		
DRAWING NO:					

888-212-8295 CableWholesale.com